



216

## STEEL SECTIONAL DOORS

### THE HEAVIEST, MOST SECURE DOOR MADE FOR COMMERCIAL/INDUSTRIAL APPLICATIONS

Designed to meet the needs of the most rugged applications, the Wayne-Dalton 216 Steel Sectional door features heavy-duty 16-gauge construction built to withstand severe weather, brutal use and exposure to security hazards. A variety of insulation and lite options are available for the Model 216, which is also available in a wide range of sizes.



COMMERCIAL DOORS &amp; OPERATORS

- RUGGED 16-GAUGE STEEL CONSTRUCTION
- STANDARD SIZES UP TO 28' 2" WIDE & 18' 1" HIGH
- THE INDUSTRY'S STRONGEST, HEAVIEST DOOR

# STEEL SECTIONAL DOORS

## MODEL 216

The Wayne-Dalton model 216 steel section door is engineered to perform, even in the most punishing environments. Whether subjected to severe weather, rough use or security hazards, the 216 will stand the test of time.

### Materials & Construction

Industrial-duty 16-gauge hot-dipped galvanized steel sections are reinforced with heavy duty vertical stiles on the interior of the Wayne-Dalton 216. Complete with prelocated extruded mounting holes, these 16-gauge "C"-shaped stiles make hinge installation quick and secure.

Bottom sections feature a flexible bulb-shaped vinyl astragal held in place by a continuous roll-formed steel retainer that reinforces the lower portion of the door at the same time.

Additional options include top head seal, joint seals and jamb seals. Optional insulation, consisting of 1 9/16" expanded polystyrene or urethane and covered with .022" minimum embossed pre-painted white steel provides an R-value of up to 7.64 and a U-value as low as 0.13. Lite options include insulated or non-insulated factory-glazed lites or complete aluminum full-view sections for maximum visibility. Operators can also be specified for use with the Wayne-Dalton 216.

Contact Wayne-Dalton for additional sizes and colors.



Optional polystyrene insulation sealed between door panel and embossed steel backing cuts heating/cooling cost.



Model 216 flush profile with shiplap joint.

### Window Options



Insulated Lites allow for visibility while maintaining security



Full view sections allow for maximum natural light and visibility

### Color Options



White Flush Finish

### Operation Options

- Chain Hoist Operation
- Motor Operation

### Performance Options

- High Cycle Spring (25K, 50K, 100K)
- 3" Track Option
- Solid Shafts
- Perimeter Weatherseal

### Safety Options

- Broken Cable Devices
- Safety Edges
- Safety Photo Eyes

### Special Application Options

- Special Track Designs
- Pass Doors
- Mullions



**STANDARD SIZES UP TO:**

28'2" WIDE & 18'1 HIGH

**Industrial-duty,  
16-gauge steel sections**



**WINDLOAD:**

MEET OR EXCEED ANSI/DASMA  
102-2003 IN ACCORDANCE  
WITH ASTM E-330-70  
(with optional windload engineering)

**BEST APPLICATIONS:**

Commercial and industrial applications  
exposed to severe weather and heavy use.

**General Operating Clearances**

Type	Headroom***		Sideroom**		Depth Into Room 2" & 3" track	Center Line of Springs	
	2" track	3" track	2" track	3" track		2" track	3" track
Standard Lift Manual 12"R	12½-17"	NA	4½"	5½"	Opening Height +18"	Opening Height +12"	NA
Standard Lift Manual 15"R	14½-20"	15½-21"				Opening Height +13"	Opening Height +14"
Standard Lift Motor Oper. 12"R	15-19½"	NA				Opening Height +12"	NA
Standard Lift Motor Oper. 15"R	15-19½"	18-23½"				Opening Height +13"	Opening Height +14"
High Lift Manual	High Lift +12"		24" One Side		Opening Height - Lift +30"	Opening Height +Lift +6½"	Opening Height +Lift +7½"
High Lift Motor Oper.							
Vertical Lift Manual	Door Height +20"		4½"	5½"	18"	Double Door Height +13"	
Vertical Lift Motor Oper.			24" One Side				
Low Headroom Manual*	6-14½"	6-14½"	6"	9"	Opening Height +20" - 26"	Does Not Apply	
Low Headroom Motor Oper.*	8½-17"	8½-17"			Opening Height +66"		

**Panel/Section Selection Guide**

Door Section and Lite Selection			Door Height and Section Selection	
Door Width	No. Panels	Max. No. Windows	Door Height	No. Sections
Up to 9'2"	2	2	Up thru 8'1"	4
9'3" to 12'2"	3	3	8'2" thru 10'1"	5
12'3" to 16'2"	4	4	10'2" thru 12'1"	6
16'3" to 19'2"	5	5	12'2" thru 14'1"	7
19'3" to 24'2"	6	7	14'2" thru 16'1"	8
24'3" & up	Call Factory		16'2" & up	Call Factory

\* Standard Lift and Low Headroom clearances are for trolley type operators. High Lift and Vertical Lift clearances are for jackshaft type operators.

**Note:** 8" side room required, one side, for doors having chain hoists.

\*\* Headrooms change with drum size on standard lift, for larger size openings (over 20' x 18') consult factory.


-Trolley operators require 48" minimum depth into room.

† Rear Mount required for minimum headroom.

Wayne-Dalton strongly recommends only using trolley type operators in the following situations:

- with standard lift track
- low headroom track
- high lift track through 19"
- 2" track utilizing 32" radius through 29" of high lift

**Track Selection Guide**

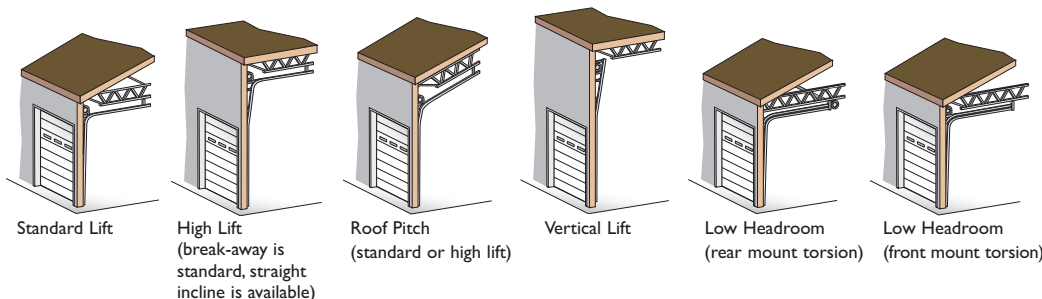

# STEEL SECTIONAL DOORS

## MODEL 216

**Note to specifiers:** Words in parentheses indicate frequently specified and highly recommended options.

### PART I – GENERAL

#### 1.01 Section Includes

- A. Sectional overhead doors [manually] [motor] operated with accessories and components.

#### 1.02 Related Work

- A. Opening preparation, miscellaneous or structural steel work, access panels finish or field painting are in the scope of work of other trades and divisions of these specifications.

#### 1.03 Reference Standards

- A. **ANSI/DASMA 102** – American National Standards Institute [A216.1] Specifications for sectional overhead doors published by Door & Access Systems Manufacturers Association International in bulletin 102-1990.
- B. **ASTM A123** – Zinc [hot-dipped galvanized] coatings on iron and steel products.
- C. **ASTM A216** – Specifications for sectional overhead type doors.
- D. **ASTM A229** – Steel wire, oil-tempered for mechanical springs.
- E. **ASTM A-653-94** – Steel sheet, zinc-coated [galvanized] by the hot-dipped process, commercial quality.
- F. **ASTM E330** – Structural performance of exterior windows, curtain walls, and doors by uniform static air pressure difference.
- G. **ASTM E413-87** – Sound transmission class. Acoustical performance value = 26.
- H. **ASTM E1332-90** – Outdoor-indoor transmission class. Acoustical performance value = 23.

#### 1.04 Quality Assurance

- A. Sectional overhead doors and all accessories and components required for complete and secure installations shall be manufactured as a system from one manufacturer.

#### 1.05 Systems Description

- A. Sectional Overhead Door: Type: **Model 216**
- B. Mounting: Continuous angle mounting for [steel] [wood] jambs
- C. Operation: [manual push-up] [chain hoist] [motor] [motor with chain hoist]
- D. Material: Galvanized steel with polyester finish paint
- E. Insulation: Optional [polystyrene] [polyurethane]

#### 1.06 Submittals

- A. Shop Drawings: Clearly indicate the following:
  - 1. Design and installation details to withstand standard windload.
  - 2. All details required for complete operation and installation.
  - 3. Hardware locations.
  - 4. Type of metal and finish for door sections.
  - 5. Finish for miscellaneous components and accessories.
- B. Product Data: Indicating manufacturer's product data, and installation instructions.

#### 1.07 Delivery, Handling, Storage

- A. Deliver products in manufacturer's original containers, dry, undamaged, seals and labels intact.
- B. Store and protect products in accordance with manufacturer's recommendations.

#### 1.08 Warranty

- A. Standard manufacturer's TEN YEAR warranty against cracking, splitting or deterioration due to rust-through.

### PART II – PRODUCTS

#### 2.01 Manufacturer

- A. Wayne-Dalton or approved equal **Model 216** insulated sectional overhead doors of steel construction complete as specified in this section and as manufactured by **Wayne-Dalton Corp.**

#### 2.02 Materials

- A. Door sections shall be of 16 gauge roll formed steel type with C-shaped 16 ga. end stiles and [16 ga.] intermediate stiles, a smooth finish, and calculated materials "R"-value of 7.64 [optional], in accordance with industry guidelines.
    - 1. Exterior Skin: Structural quality, hot-dipped galvanized steel, with smooth finish, and with baked-on polyester primer and white polyester finish coats.
    - 2. Insulation: Cavity shall be filled with laid-in-place [polyurethane] [expanded polystyrene] and covered with 0.015" minimum embossed steel [24 GA, 20 GA] held in place with polymer clips.
  - B. Track: Track design shall be [standard lift] [high lift] [vertical lift] [low headroom]. Vertical mounting angles shall be hot-dipped galvanized. Track size shall be [2"] [3"]. Vertical track shall be graduated to provide wedge type weathertight closing with continuous angle mounting for [steel] [wood] jambs, and shall be fully adjustable to seal door at jambs. Horizontal track shall be reinforced with continuous angle of adequate length and gauge to minimize deflection.
- Note:** Horizontal track applies to standard lift, high lift, low headroom and follow-the-roof designs only.
- C. Hardware: Hinge and Roller Assembly:
    - 1. Hinges and brackets shall be made from hot-dipped, galvanized steel.
    - 2. Track rollers shall be case-hardened inner steel races with 10-ball [2"] [3"] rollers.
    - 3. All factory authorized attachments shall be made at locations indicated.
  - D. Counterbalance:
    - 1. Springs shall be torsion type, low-stress, helical wound, oil-tempered spring wire to provide minimum [15,000 standard] [25,000] [50,000] [100,000] cycles of use, on continuous steel [solid].
    - 2. Spring fittings and drums made of die cast, high strength aluminum.
    - 3. Pre-formed galvanized steel aircraft cable shall provide a minimum of a 5:1 safety factor.

#### 2.03 Operation

- A. Operation shall be [manual push-up] [chain hoist] [motor] [motor with chain hoist].
- Note:** Manufacturer does not recommend chain hoists or jack shaft operators on the following track applications.
- 15" radius standard lift with roof pitch less than 2:12
  - Hi-lift less than 24"
  - Hi-lift between 12" – 23" with roof pitch less than 1:12
  - Low headroom track
- Special chain hoist assemblies (using a trolley rail) are available for the above track systems.

#### 2.04 Locks

- A. Locks shall engage the right-hand vertical track and utilize [an interior side lock] [standard size rim cylinder].

#### 2.05 Weatherstripping

- A. Doors shall be equipped with vinyl bulb shaped astragal as standard on the bottom section. Optional joint, top head, and jamb seals are available.

#### 2.06 Glazing

- A. Optional.

#### 2.07 Windload

- A. Windload – per DASMA 102-2003 and as required by local codes.

### PART III – EXECUTION

#### 3.01 Installation

- A. General:
  - 1. Install doors in accordance with manufacturer's instructions and standards. Installation shall be by an authorized Wayne-Dalton representative.
  - 2. Verify that existing conditions are ready to receive sectional overhead door work.
  - 3. Beginning of sectional overhead door work means acceptance of existing conditions.
- B. Install door complete with necessary hardware, jamb and head mold strips, anchors, inserts, hangers, and equipment supports in accordance with final shop drawings, manufacturer's instructions, and as specified herein.
- C. Fit, align and adjust sectional overhead door assemblies level and plumb for smooth operation.
- D. Upon completion of final installation, lubricate, test and adjust doors to operate easily, free from warp, twist or distortion and fitting for entire perimeter.

**Note:** Architect may consider providing a schedule when more than one sectional overhead door or opening type is required.

#### 3.02 Materials (See note above.)

Specifications and technical information also available at [www.arcata.com](http://www.arcata.com), SpecWizard™, and Sweets.com®.

### Distributed By:



COMMERCIAL DOORS & OPERATORS

For technical information, visit:

[www.wayne-dalton.com/commercial](http://www.wayne-dalton.com/commercial)

© 2008 Wayne-Dalton Corp. • One Door Drive • Mt. Hope, Ohio 44660 • 800-764-1457  
Mt. Hope, OH • Dalton, OH • Trail, OH • Pensacola, FL • Portland, OR

Printed in U.S.A.  
Item #332548 Revised 01/2008