



C-20

STEEL SECTIONAL DOORS

STRONG, VISUALLY APPEALING DOORS FOR MODERATE TO HEAVY-DUTY COMMERCIAL APPLICATIONS

Wayne-Dalton's C-20 steel sectional overhead doors are available in a wide variety of sizes and configurations. The design provides high strength at an excellent value. Featuring 20-gauge ribbed steel sections and 20-gauge center and end stiles, the C-20 is available with a number of lite and insulation options.



COMMERCIAL DOORS & OPERATORS

- 20-GAUGE STEEL CONSTRUCTION
- PROVEN STRENGTH AND DURABILITY
- STANDARD SIZES UP TO 30' 2" WIDE AND 22' 1" HIGH



STEEL SECTIONAL DOORS

C-20

Every component and feature on the Wayne-Dalton C-20 Steel Sectional Door are designed, engineered, and constructed to enhance the building's architectural beauty. It assures smooth, efficient operation and saves installation time and effort. Unique 2" x 3" box-stile design, plus tongue-and-groove construction, adds vertical stability and strength. Stiles are continuously-bonded to the skin surface with high-strength adhesive, resulting in the strongest possible unit. The surface is ribbed for even more strength. Independent tests show that models C-20 sectional doors are significantly stronger compared to leading competitors.


Materials & Construction

Wayne-Dalton's C-20 steel sectional doors feature pre-finished 20-gauge hot-dipped galvanized sections roll-formed to a full 2" thickness for ultimate strength and durability. Fully-fitted 3" wide boxed stiles are adhered with adhesive, preventing rust and leakage associated with rivets. Standard bottom door seal along with optional seals on the perimeter and between sections greatly reduce air leakage, adding to the thermal efficiency of the building.

Additional options include insulation and weather stripping that provide a U-value of 0.13 and an R-value of 7.60; factory installed vision lites or full view sections; electric operator; and special engineering to meet windload requirements.

Contact Wayne-Dalton for additional sizes and colors.

Color Options



White



Operation Options

- Chain Hoist Operation
- Motor Operation

Performance Options

- High Cycle Spring (25K, 50K, 100K)
- 3" Track Option
- Solid Shafts
- Perimeter Weatherseal
- Insulation

Window Options




Vision Lites allow for visibility while maintaining security

Safety Options

- Broken Cable Devices
- Safety Edges
- Safety Photo Eyes

Special Application Options

- Special Track Designs
- Mullions

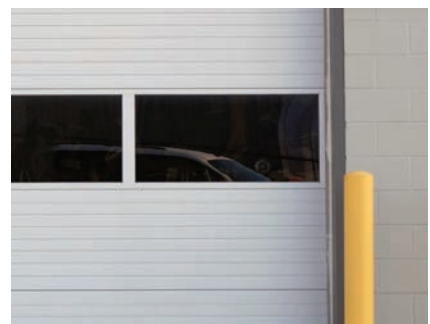

Aluminum full view sections allow for maximum natural light and visibility



STANDARD SIZES UP TO:
30'2" WIDE & 22'1" HIGH

ENERGY EFFICIENCY VALUES:

U = 0.13
R = 7.60

WINDLOAD:



MEET OR EXCEED ANSI/DASMA
102-2003 IN ACCORDANCE
WITH ASTM E-330-70
(with optional windload engineering)

BEST APPLICATIONS:

Where rugged durability is needed.

General Operating Clearances



Type	Headroom***		Sideroom**		Depth Into Room	Center Line of Springs	
	2" track	3" track	2" track	3" track	2" & 3" track	2" track	3" track
Standard Lift Manual 12"R	12½-17"	NA	4½"	5½"	Opening Height +18"	Opening Height +12"	NA
Standard Lift Manual 15"R	14½-20"	15½-21"				Opening Height +13"	Opening Height +14"
Standard Lift Motor Oper. 12"R	15-19½"	NA			Opening Height +66"	Opening Height +12"	NA
Standard Lift Motor Oper. 15"R	15-19½"	18-23½"				Opening Height +13"	Opening Height +14"
High Lift Manual	High Lift +12"		24" One Side		Opening Height - Lift +30"	Opening Height	Opening Height
High Lift Motor Oper.						+Lift +6½"	+Lift +7½"
Vertical Lift Manual	Door Height +20"		4½"	5½"	18"	Double Door Height +13"	
Vertical Lift Motor Oper.			24" One Side				
Low Headroom Manual*	6-14½"	6-14½"	6"	9"	Opening Height +20" - 26" Opening Height +66"	Does Not Apply	
Low Headroom Motor Oper.*	8½-17"	8½-17"					

Panel/Section Selection Guide

Door Width	No. Panels	Door Height	No. Sections
Up to 8' 3"	2	Up to 8' 1"	4
8' 2" to 12' 3"	3	8' 4" to 10' 1"	5
10' 2" to 12' 1"	4	10' 2" to 12' 1"	6
12' 2" to 14' 1"	5	10' 2" to 14' 1"	7
14' 2" to 16' 1"	6	14' 2" to 16' 1"	8
16' 2" to 18' 1"	7	16' 8" to 18' 1"	9
27' 7" to 30' 2"	8	18' 2" & up	Call Factory

- * **Note:** Rear mount torsion requirements shown on chart. See drawings for front mount torsion clearances.
- ** **Note:** 8" sideroom required, on one side for doors having chain hoist. 24" side room required, on one side for doors having jackshaft operators.
- *** **Note:** Clear headroom is based on cable size so please contact factory for specific headroom for your door.

Track Selection Guide

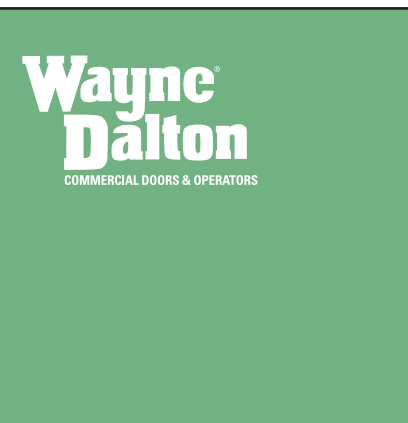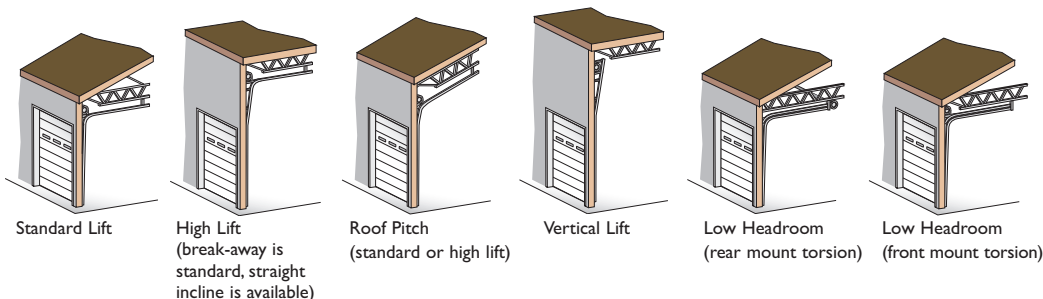

STEEL SECTIONAL DOORS

C-20

Note to specifiers: Words in parentheses indicate frequently specified and highly recommended options.

PART I – GENERAL

1.01 Section Includes

- A. Sectional overhead doors [manually] [motor] operated with accessories and components.

1.02 Related Work

- A. Opening preparation, miscellaneous or structural steel work, access panels finish or field painting are in the scope of work of other trades and divisions of these specifications.

1.03 Reference Standards

- A. **ANSI/DASMA 102** – American National Standards Institute [A216.1] Specifications for sectional overhead doors published by Door & Access Systems Manufacturers Association International in bulletin 102-1990.
- B. **ASTM A123** – Zinc [hot-dipped galvanized] coatings on iron and steel products.
- C. **ASTM A216** – Specifications for sectional overhead type doors.
- D. **ASTM A229** – Steel wire, oil-tempered for mechanical springs.
- E. **ASTM A-653-94** – Steel sheet, zinc-coated [galvanized] by the hot-dipped process, commercial quality.
- F. **ASTM E330** – Structural performance of exterior windows, curtain walls, and doors by uniform static air pressure difference.
- G. **ASTM E413-87** – Sound transmission class. Acoustical performance value = 24
- H. **ASTM E1332-90** – Outdoor-indoor transmission class. Acoustical performance value = 21.

1.04 Quality Assurance

- A. Sectional overhead doors and all accessories and components required for complete and secure installations shall be manufactured as a system from one manufacturer.

1.05 Systems Description

- A. Sectional Overhead Door: Type:
Model C-20
- B. Mounting: Continuous angle mounting for [steel] [wood] jambs [bracket mounting for wood jambs]
- C. Operation: [manual push-up] [chain hoist] [motor] [motor with chain hoist]
- D. Material: Galvanized steel with polyester finish paint
- E. Insulation: Optional [polystyrene] [polyurethane]

1.06 Submittals

- A. Shop Drawings: Clearly indicate the following:
 - 1. Design and installation details to withstand standard windload.
 - 2. All details required for complete operation and installation.
 - 3. Hardware locations.
 - 4. Type of metal and finish for door sections.
 - 5. Finish for miscellaneous components and accessories.
- B. Product Data: Indicating manufacturer's product data, and installation instructions.

1.07 Delivery, Handling, Storage

- A. Deliver products in manufacturer's original containers, dry, undamaged, seals and labels intact.
- B. Store and protect products in accordance with manufacturer's recommendations.

1.08 Warranty

- A. Standard manufacturer's TEN YEAR warranty against cracking, splitting or deterioration due to rust-through.

PART II – PRODUCTS

2.01 Manufacturer

- A. Wayne-Dalton or approved equal **Model C-20** insulated sectional overhead doors of steel construction complete as specified in this section and as manufactured by **Wayne-Dalton Corp.**

2.02 Materials

- A. Door Sections: Shall be of roll formed steel type with box shaped 20 ga. stile construction and calculated materials "R" value of 7.60 [optional] in accordance with industry guidelines.
 - 1. Exterior Skin: Structural quality, hot-dipped galvanized steel, with smooth finish 20 ga. with baked-on polyester primer and white polyester finish coats and 4 deep pinstripes.
 - 2. Insulation: Cavity shall be filled with laid-in-place [polyurethane] [expanded polystyrene] and covered with [vinyl] [0.022" minimum embossed [24 GA.] [20 GA.] steel] held in place with polymer clips.
- B. Track: Track design shall be [standard lift] [high lift] [vertical lift] [low headroom]. Vertical mounting angles shall be hot-dipped galvanized. Track size shall be [2"] [3"]. Vertical track shall be graduated to provide wedge type weathertight closing with continuous angle mounting for [steel] [wood] jambs, and shall be fully adjustable to seal door at jambs [bracket mount for wood]. Horizontal track shall be reinforced with continuous angle of adequate length and gauge to minimize deflection.

Note: Horizontal track applies to standard lift, high lift, low headroom and follow-the-roof designs only.

- C. Hardware: Hinge and Roller Assembly:
 - 1. Hinges and brackets shall be made from hot-dipped, galvanized steel.
 - 2. Track rollers shall be case-hardened inner steel races with 10-ball [2"] [3"] rollers.
 - 3. All factory authorized attachments shall be made at locations indicated.
- D. Counterbalance:
 - 1. Springs shall be torsion type, low-stress, helical wound, oil-tempered spring wire to provide minimum [10,000 standard] [25,000] [50,000] [100,000] cycles of use, on continuous steel [solid] shaft.
 - 2. Spring fittings and drums made of die cast, high strength aluminum.
 - 3. Pre-formed galvanized steel aircraft cable shall provide a minimum of a 5:1 safety factor.

2.03 Operation

- A. Operation shall be [manual push-up] [chain hoist] [motor] [motor with chain hoist].

Note: Manufacturer does not recommend chain hoists or jack shaft operators on the following track applications.

- 15" radius standard lift with roof pitch less than 2:12
- Hi-lift less than 24"
- Hi-lift between 12" – 23" with roof pitch less than 1:12
- Low headroom track

Special chain hoist assemblies (using a trolley rail) are available for the above track systems.

2.04 Locks

- A. Locks shall engage the right-hand vertical track and utilize [an interior side lock] [standard size rim cylinder].

2.05 Weatherstripping

- A. Doors shall be equipped with vinyl bulb shaped astragal as standard on the bottom section. Optional joint, top head, and jamb seals are available.

2.06 Glazing

- A. Optional.

2.07 Windload

- A. Windload – per DASMA 102-2003 and as required by local codes.

PART III – EXECUTION

3.01 Installation

- A. General:
 - 1. Install doors in accordance with manufacturer's instructions and standards. Installation shall be by an authorized Wayne-Dalton representative.
 - 2. Verify that existing conditions are ready to receive sectional overhead door work.
 - 3. Beginning of sectional overhead door work means acceptance of existing conditions.
- B. Install door complete with necessary hardware, jamb and head mold strips, anchors, inserts, hangers, and equipment supports in accordance with final shop drawings, manufacturer's instructions, and as specified herein.
- C. Fit, align and adjust sectional overhead door assemblies level and plumb for smooth operation.
- D. Upon completion of final installation, lubricate, test and adjust doors to operate easily, free from warp, twist or distortion and fitting for entire perimeter.

Note: Architect may consider providing a schedule when more than one sectional overhead door or opening type is required.

3.02 Materials (See note above.)

Specifications and technical information also available at www.arcad.com, SpecWizard™, and Sweets.com®.

Distributed By:



COMMERCIAL DOORS & OPERATORS

For technical information, visit:

www.wayne-dalton.com/commercial

© 2008 Wayne-Dalton Corp. • One Door Drive • Mt. Hope, Ohio 44660 • 800-764-1457
Mt. Hope, OH • Dalton, OH • Trail, OH • Pensacola, FL • Portland, OR

Printed in U.S.A.
Item #332546 Revised 01/2008